




ARENA LED 8274




ARENA 6724

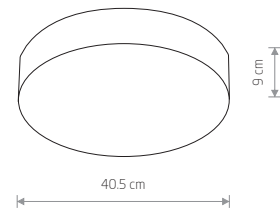

ARENA

painted steel, plastic PMMA


- 6724 6725
- 6770 8273
- 3xE14, max 20W
- IP44

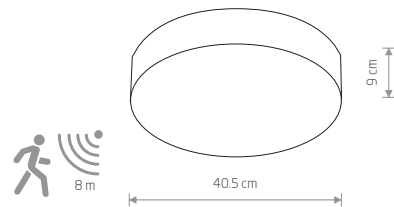

ARENA SENSOR

painted steel, plastic PMMA

- 8832 8833 7953
- 3xE14, max 20W
- IP44

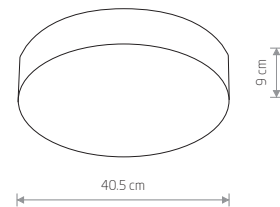

ARENA LED

painted steel, plastic PMMA

- 6726 6727
- 6771 8274



ARENA LED 6727

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
6726	18W LED	4000K	1600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h
6727	18W LED	4000K	1600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h
6771	18W LED	4000K	1600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h
8274	18W LED	4000K	1600 lm	100°	≥ 80	220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h